

AIR PURIFICATION AND HEAT RECOVERY VENTILATION TECHNICAL-SALES DOCUMENTATION



Aldes
Connect



InspirAIR® Top

THE CONNECTED HEAT RECOVERY
VENTILATION AND AIR PURIFICATION
SOLUTION THAT FILTERS EFFICIENTLY
THE FINEST POLLUTANTS AND
ADAPTS ITSELF TO YOUR NEEDS

4heat°
vytápění a chlazení



#HealthyLiving*

CONTENTS

GENERAL PRESENTATION	7
WHY CHOOSE INSPIRAIR® TOP?	7
ALDES ACTS FOR AIR QUALITY	9
INSTALLATION OVERVIEW	11
CONTROL MODES	13
WALTER® AND INSPIRAIR® TOP:	
TWO ALLIES TO ENSURE AIR QUALITY	13
ALDESCONNECT™	15
LIGHT SIGNAL	16
REMOTE CONTROL	17
CUSTOMER SERVICES AND SUPPORT	19
ALDES SERVICES	19
ALDES BUSINESS TOOLS	20
ALDES TRAINING	20
TECHNICAL PRESENTATION	21
EXPLODED VIEW	21
RANGE DESCRIPTION	22
PROJECT TYPES	22
RANGE AND REFERENCES	22
SCOPE OF SUPPLY	22
STANDARDS AND REGULATIONS	23
ACCESSORIES	24
CONSUMABLES	24
TECHNICAL DETAILS	25
MAIN FEATURES	25
DIMENSIONS AND WEIGHT	27
ELECTRICAL DETAILS	27
AERAUIC CONNECTION	27
ACOUSTIC PERFORMANCE	29
AIRFLOW CURVES (AIRFLOW / PRESSURE)	30
THERMAL EFFICIENCY	30



Things are clear.

Today, we spend over 90 % of our time indoors and the air we breathe is up to 8 times more polluted than outdoor air. This is why it is urgent to join to

AIR REVOLUTION

and strive to combat CO₂, fine particles and all these invisible enemies that affect our health by causing allergies, insomnia or respiratory diseases.

With its InspirAIR® range, Aldes enables everyone to improve the indoor air quality of their home and adapt it to their needs.

LOW FINE PARTICLE LEVELS

IN A BEDROOM

MAY INCREASE THE LIKELIHOOD

OF EFFICIENT SLEEP BY UP TO 50%.⁽¹⁾





InspirAIR® Top

UP TO 80 % OF EPM1⁽²⁾ POLLUTANTS FILTERED.

(1) Calculated based on 8 hours of sleep.

Source: Relationship of Air Pollution to Sleep Disruption: The Multi-Ethnic Study of Atherosclerosis (MESA) Sleep and MESA-Air Studies; M.E. Billings et al., 2017.

(2) ePM1: fine particles of 1 micrometer with the bacteria filter.

WHY CHOOSE INSPIRAIR® TOP?

For air quality

Widest range of filters on the market and custom recommendations
Automatic ventilation control based on indoor air quality
via multi-pollutant sensors (CO₂, PM 2.5, VOC)
Exclusive radon mode
Enthalpic exchanger to guarantee optimal humidity in indoor air

For performance

Benchmark thermic and electrical performances
Made in France
Complete and performant ventilation network system solution

For comfort


Very silent unit
Automatic bypass for night cooling

For end user interaction

Light signal informing about unit status
Intuitive InspirAIR® remote controls
AldesConnect™ app and Smart Home interoperability

For interaction with professionals

Small dimensions for installation in standard 600 x 600 mm cupboard
Easy inversion of airflows
Easy to install, configure and maintain
Support from selection to maintenance with Aldes digital tools






ALDES ACTS FOR AIR QUALITY

Aldes acts for air quality through innovative functions and the widest range of filters on the market, to cover all types of exterior pollutants.

ALDES EXPERTISE FOR AIR QUALITY AT HOME

The exclusive filter recommendation function is provided in the AldesConnect™ app. It analyses the quality of outdoor air and questions the end user on his requirements in terms of indoor air quality (especially for allergies or potential pathologies) and can then recommend the most appropriate filters for their needs.

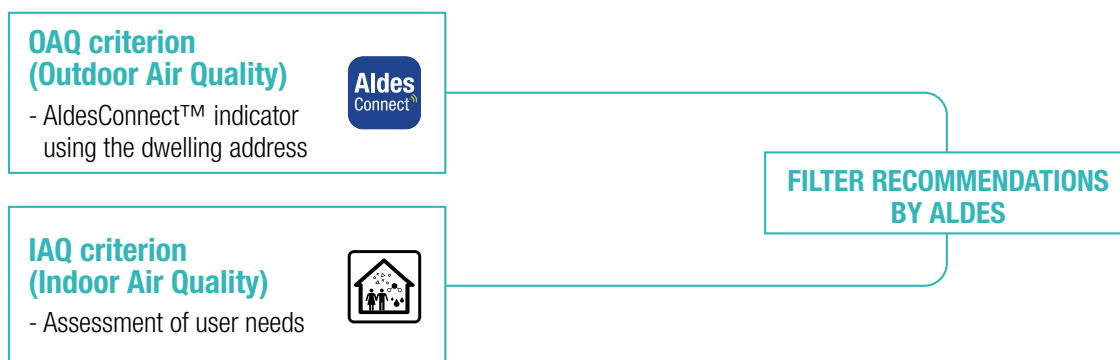

PERFORMANCE OF FILTRATION SOLUTION EXCLUSIVE TO ALDES

A range of filters suited to both users needs and their outdoor environment.

EXAMPLES OF POLLUTANTS	 Pollen > 10 µm	 Fine particles 10 µm	 Fine particles 2.5 µm	 Bacteria 1 µm	 Volatile organic compounds
	Airborne pollution: soil, sand, ash	Pollen, grass	Urban pollution: vehicle & industrial emissions	Bacteria	Odours
POLLEN FILTER	Coarse 65 %	-	-	-	-
PARTICLE FILTER	-	ePM10 50 %	-	-	-
FINE PARTICLE FILTER	-	ePM10 85 %	ePM2.5 65 %	ePM1 50 %	-
BACTERIA FILTER	-	ePM10 95 %	ePM2.5 95 %	ePM1 80 %	-
VOC filter	-	ePM10 85 %	ePM2.5 65 %	ePM1 50 %	Serves to eliminate gases and COV from incoming air


Filtration levels expressed as per ISO 16980

RADON

Radon is a radioactive gas naturally present in the soil of certain regions. It infiltrates homes and cannot be captured efficiently by any filtration system. In the long term, exposure to this gas may be harmful to health. InspirAIR® Top acts through a rapid configuration of ventilation imbalance, meaning that air is quickly renewed in rooms without discomfort for occupants. This solution is recommended by the French Institute for Radiological Protection and Nuclear Safety (IRSN).



See the radon potential by township [click here](#)

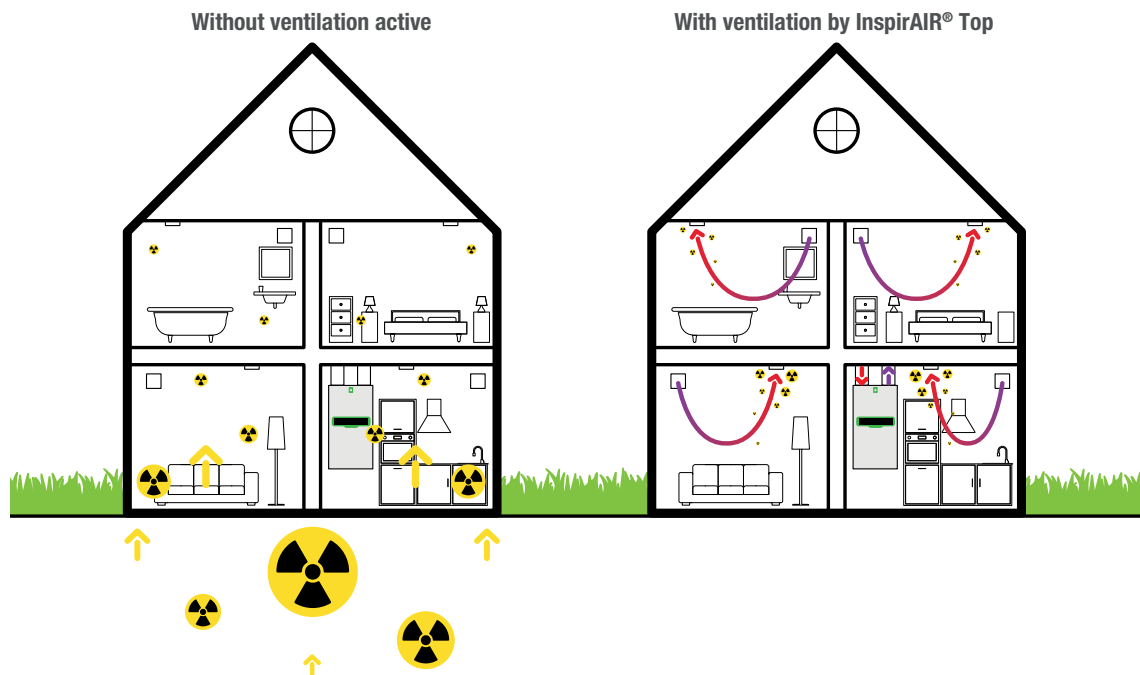

Recommended by the French Institute for Radiological Protection and Nuclear Safety (IRSN)

AUTOMATIC VENTILATION CONTROL ACCORDING TO INDOOR AIR QUALITY


Aldes offers a range of air quality sensor accessories for installation in living spaces (lounges or bedrooms). The real-time measurement of indoor air quality enables the automatic adjustment of ventilation speeds to ensure healthy air for occupants.




The Walter® connected sensor features 4 detectors that measure carbon dioxide (CO₂), volatile organic compounds (VOC), fine particles with a diameter of or above 2.5 µm (PM2.5), temperature (T°) and humidity (H₂O).



The InspirAIR® CO₂ remote control measures carbon dioxide (CO₂).

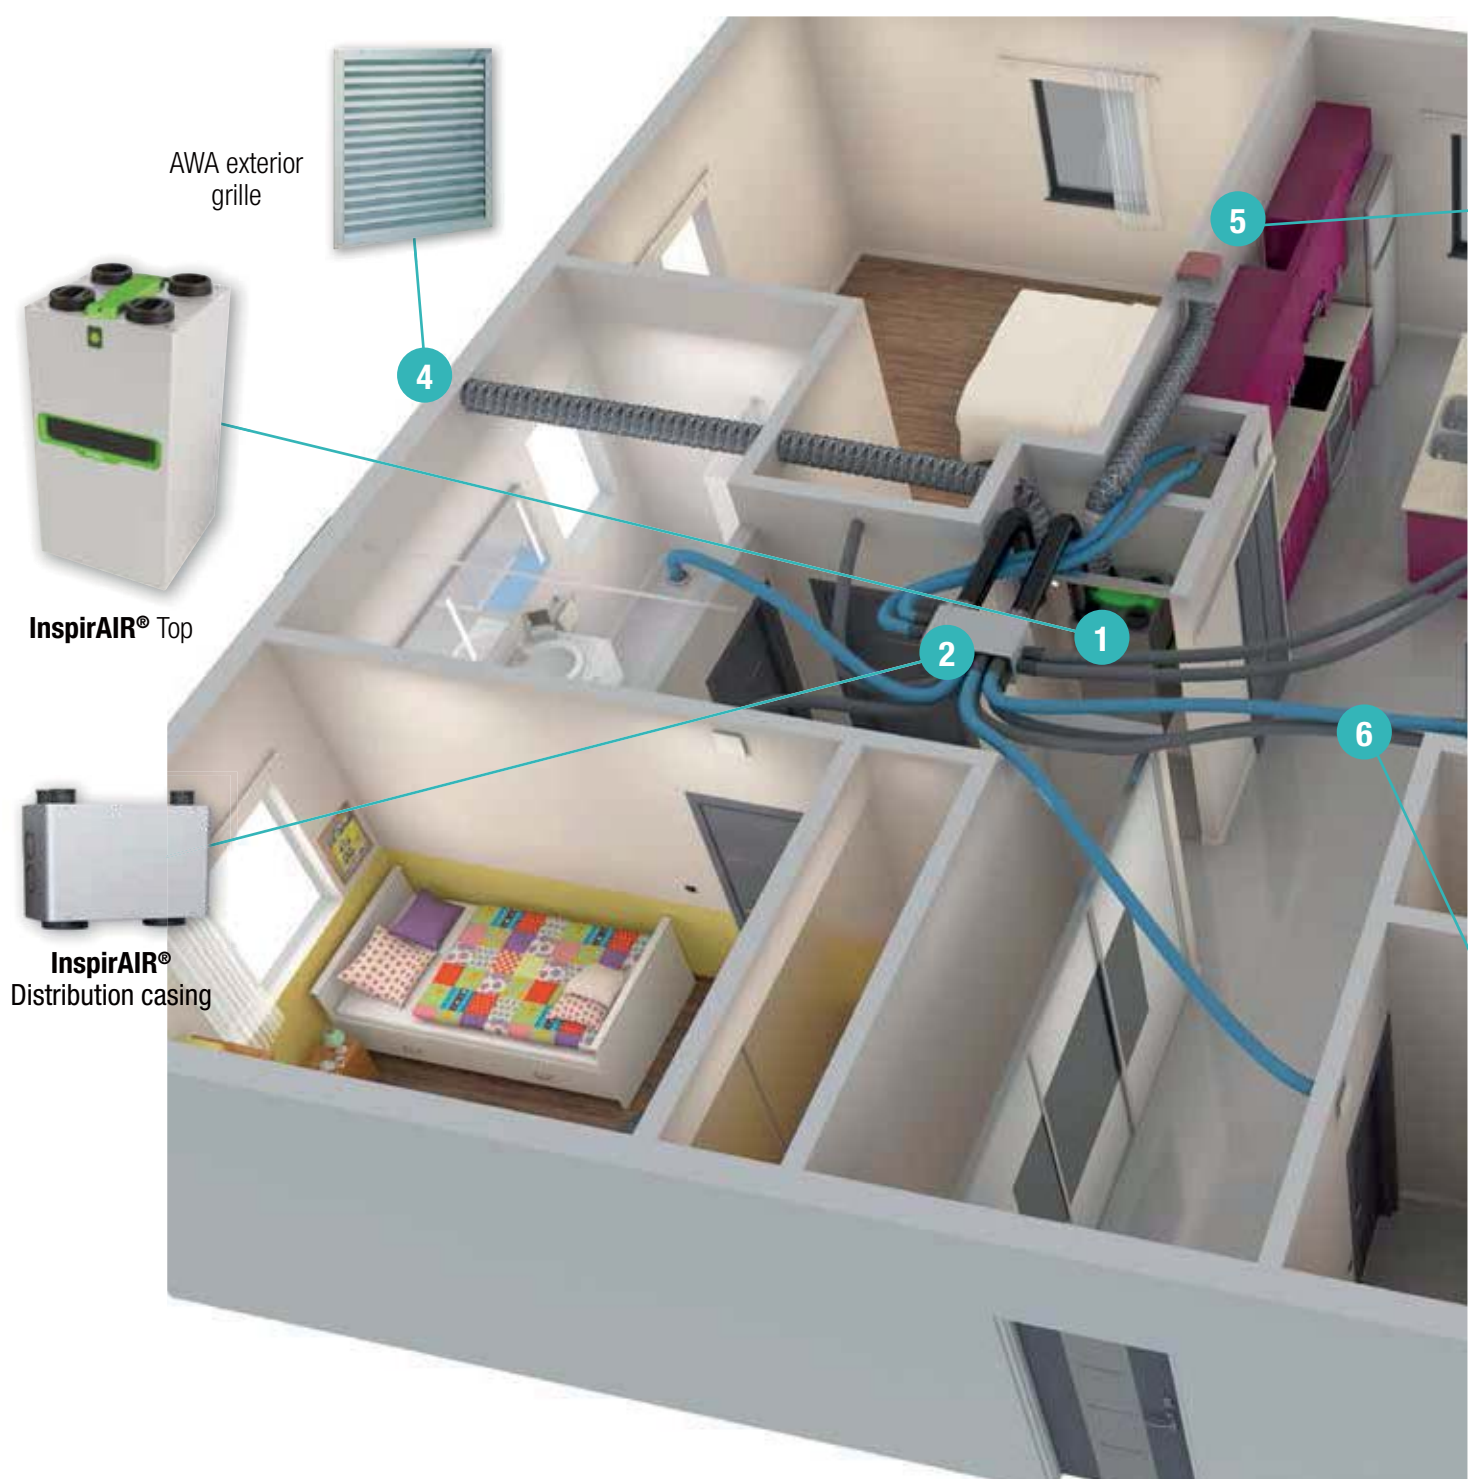

- 1 InspirAIR® Top
- 2 InspirAIR® Distribution casing
- 3 Walter® air quality sensor
- 4 Fresh air inlet
- 5 Roof cowl
- 6 Air intake and exhaust ducting and terminals

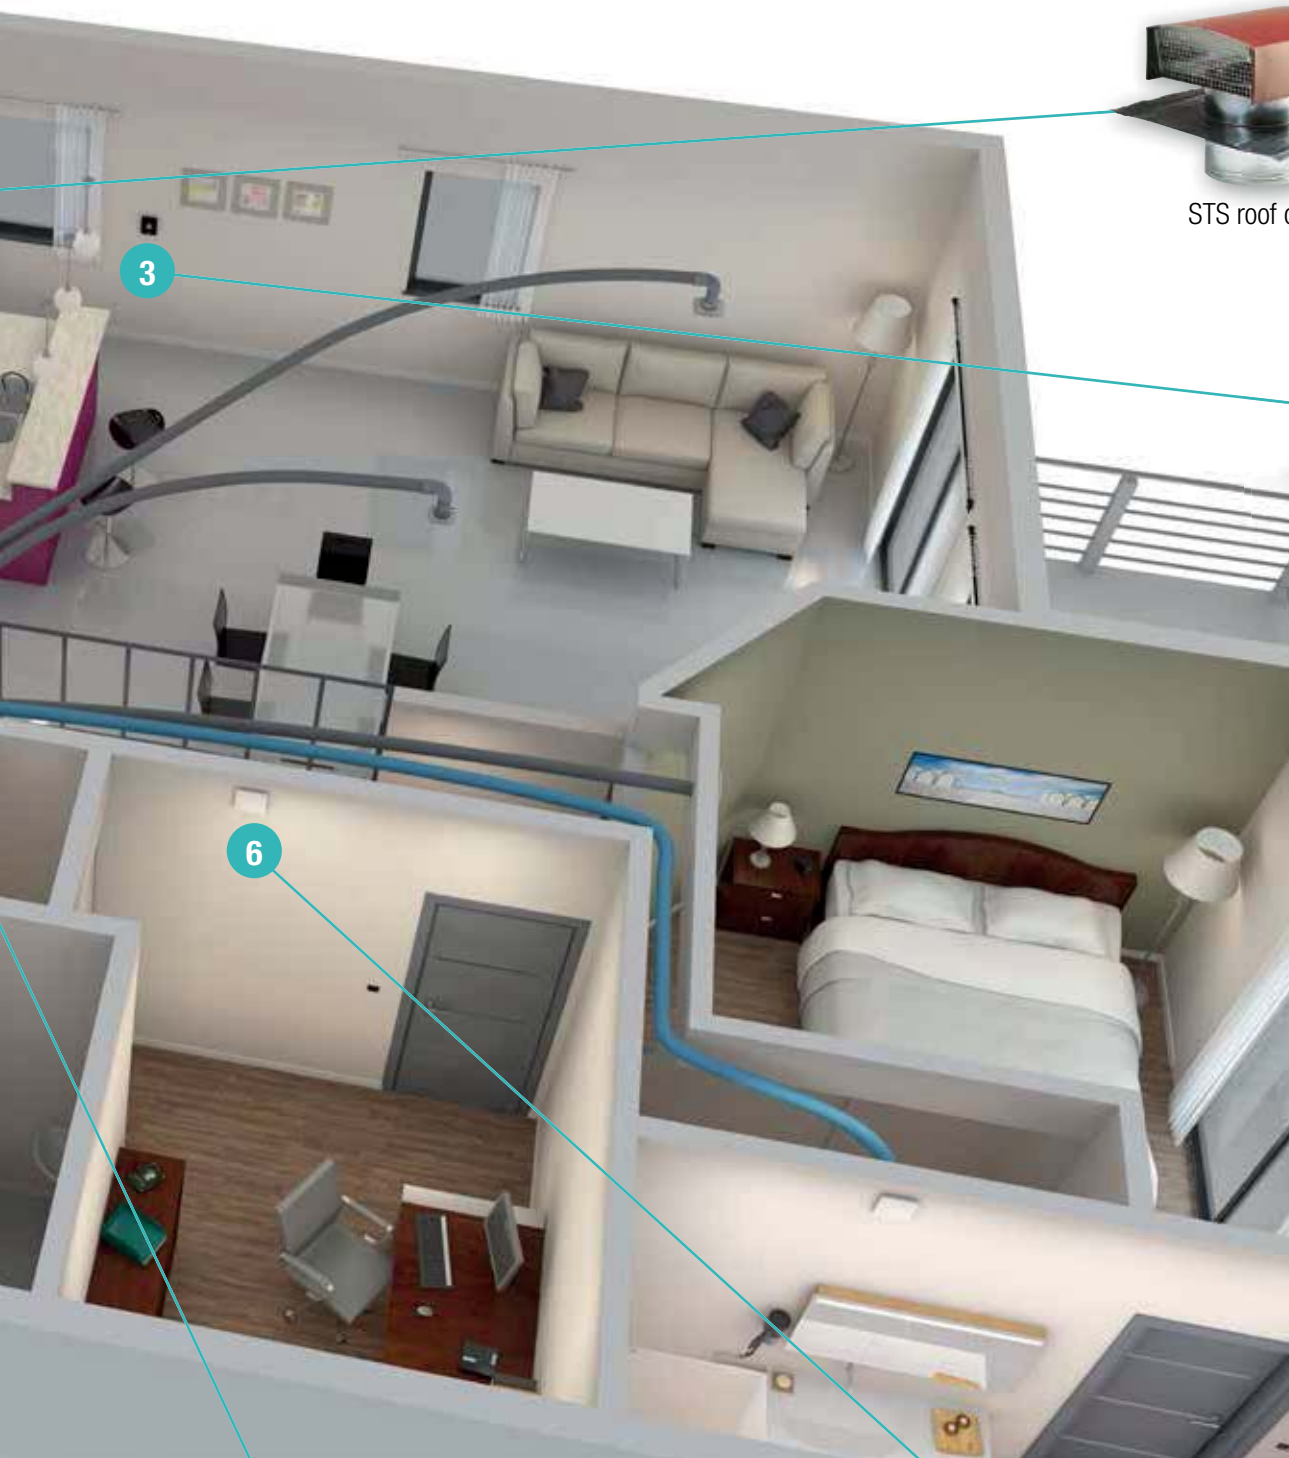

STS roof outlet



Walter® air quality sensor



Optiflex® ducts & accessories



ColorLINE® grilles

WALTER® AND INSPIRAIR® TOP: TWO ALLIES TO ENSURE AIR QUALITY



More measurements

4 dedicated detectors to measure indoor air quality: CO₂, PM 2.5, COV, HY and T°.

More control

Adapts the extraction of polluted air and purifies the incoming air we breathe.

More purified air

Cleanses incoming air of pollen, fine particles and bacteria via its unique filtration system.


PRINCIPLE OF OPERATION

The Walter® and InspirAIR® Top equipped with the AldesConnect™ Box communicate with each other over the home wireless network.

Associating Walter® with InspirAIR® Top requires the use of the AldesConnect™ app.

The two products communicate with each other constantly to adapt the ventilation speed.

The AldesConnect™ app enables the user to consult the status of Walter® and InspirAIR® Top in real time.

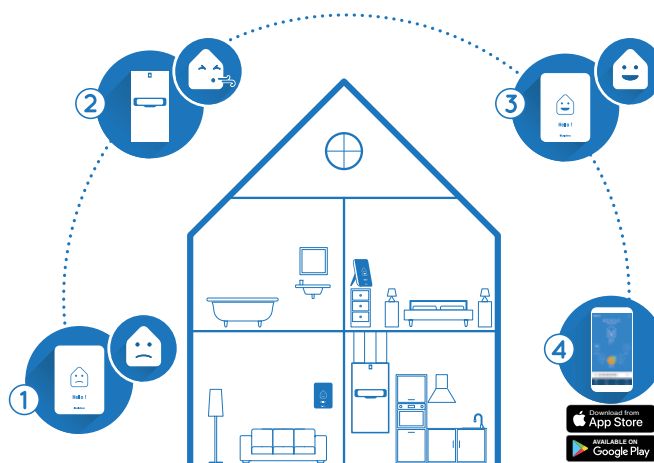



ALDESCONNECT™

Discover the functions offered by your AldesConnect™ application:
It is now possible to act on the quality of indoor air in total serenity...



Switch to daily mode, boost or guest depending on your needs, or activate a programmed schedule.




View outdoor air quality and get advice on outdoor activities.



Going on holiday?
Active holiday mode and set your return date.



View the indoor air quality level by day, by week and by month.

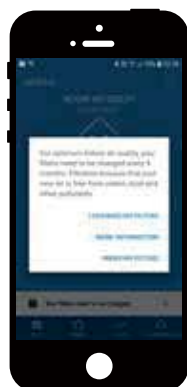

Be informed when it's time to change filters and order them online.



Set ventilation modes hour by hour on a weekly basis.



The AldesConnect™ Box modem is delivered with InspirAIR® Top Premium. InspirAIR® Top Classic is compatible with the modem available as an accessory.

Order filters and the AldesConnect™ Box at www.aldesconnect-filters.com



SMART HOME INTEROPERABILITY

InspirAIR® Top includes the Modbus protocol as standard. It enables the unit to be connected to a local supervision system. InspirAIR® Top can also be integrated into a variety of home automation systems (e.g. Sowe) for ventilation control that precisely matches your needs (with AldesConnect™ Box).



MANUAL CONTROL

For more day-to-day comfort and control

Ventilation modes



DAILY

Daily mode corresponds to the ventilation speed required for normal air renewal throughout the home on a day-to-day basis. It has no time limit.



BOOST

Boost mode is used to manually activate high speed mode when required, to increase airflow in a kitchen, shower room etc.



HOLIDAY

Holiday mode reduces the ventilation speed to a minimum for a specified duration, thereby reducing energy use when the dwelling is unoccupied.



GUEST

GUEST mode puts the system at maximum airflow setting. If the indoor air is highly polluted, this airflow can evacuate pollutants more rapidly. It is time-limited to 8 hours. When this time has expired, the system automatically returns to Daily mode.

Multiple functions

Summer comfort

An automatic bypass serves to exclude the heat exchanger when you wish to inlet cool outdoor air.

Winter comfort

Combined with a pre heating coil accessory, the unit heats incoming air in the heat exchanger and ensures correct operation of ventilation down to outdoor temperatures of -30°C.

Open fireplace mode

The system generates overpressure to enable easy lighting and operation of an open fireplace.

LIGHT SIGNAL

InspirAIR® Top Premium is equipped with a light signal on the front panel which changes colour to inform the occupant of its operating state.



Air quality is good



Air quality is deteriorating




Filter replacement alert



Major malfunction signal

REMOTE CONTROL

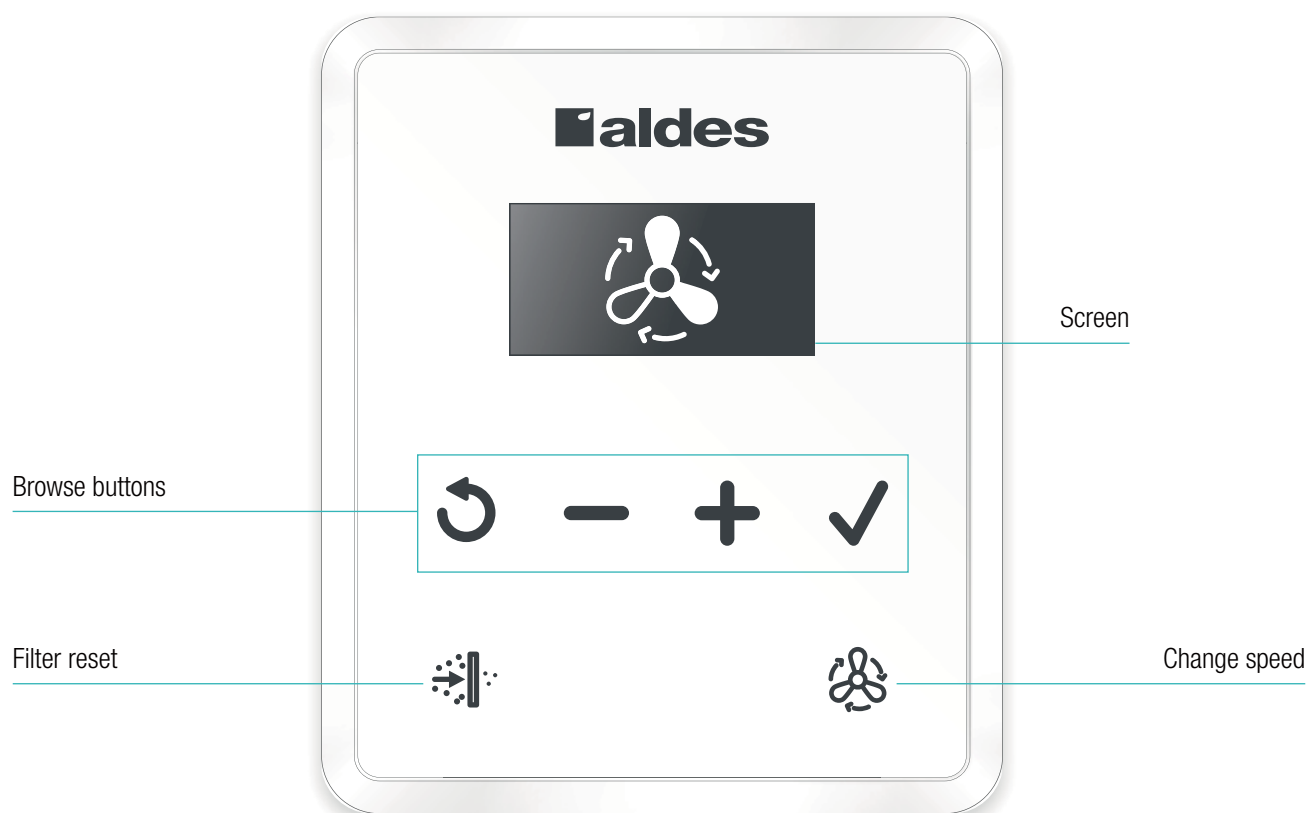

New remote control with elegant design

- Sold as an accessory, available in 2 versions (with or without CO₂ sensor)
- Dimensions: 92.5 x 110 x 26 mm
- 6 buttons and 2 LED lights for easy browsing and clear indications
- 2 user profiles:

USER

- Opt for automatic control of your ventilation according to air quality measured by a built-in high-precision 0-5000 ppm CO₂ sensor (CO₂ version remote control)
- Select the unit ventilation speed (Holiday, Daily, Boost or Guest)
- Reset filter timer after changing filters
- Configure a “weekly schedule” to reduce or increase ventilation according to the day and hour

INSTALLER

(password protected) / (Non-exhaustive list)

- Select the control mode: constant airflow or constant speed (self-balanced control)
- Adjust airflow (m³/h or l/s) or speed (%) depending on the control mode selected
- Adjust an imbalance (air supply / exhaust)
- Select a duration for each specific control mode (Holiday / Boost / Guest)
- Access unit operation states during maintenance operations
- Install software updates via the USB port


Further information available in the remote control manual.



ALDES SERVICES

The Aldes Service team supports installers with Commissioning packages for InspirAIR® units and the associated ventilation network.

The intervention is divided into 4 key phases:

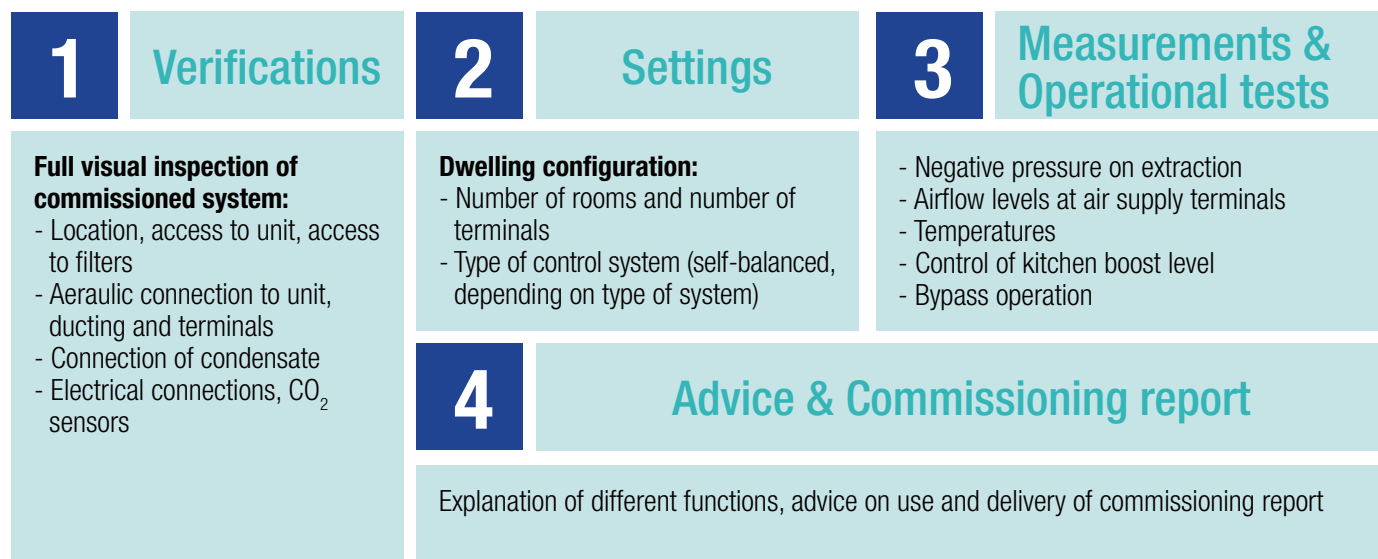

The +

Your warranty starts on the actual date of commissioning by Aldes!

Range of services*	Product reference concerned	Reference code
HRV system commissioning travel included	InspirAIR® Top 300 Classic & Premium	11199015
Commissioning of additional unit	InspirAIR® Top 450 Classic & Premium	11199016
HRV commissioning follow-up inspection	InspirAIR® Top 300 & 450 Premium ERV	11199008

(1) Update in semester 2 2020

(2) Commissioning service for heat recovery ventilation (transport included).

(3) Addition of a Commissioning service done at the same location, on the same day as the first HRV, 5 additional for 1 main maximum (transport included).

(4) Additional visit if Commissioning was impossible during the first intervention (transport included).

ALDES BUSINESS DIGITAL TOOLS

TRADE TOOLS



Conceptor Ventilation⁽¹⁾ helps in the design and aerodynamic dimensioning of your ventilation networks (exhaust or heat recovery) in single family dwellings or multi-occupancy buildings. It calculates duct diameters according to the exhaust airflow generated by the fan and pressure losses.



Selector poWair⁽¹⁾ helps to select the right fan unit (exhaust or heat recovery) and the associated ducting for single family dwellings or multi-occupancy buildings in light of applicable regulations. It also serves to calculate fan consumption based on the pressure losses of each project.



Aldes Configurator⁽²⁾ supports the installer through the installation, configuration, commissioning and maintenance of InspirAIR® and the complete ventilation network. It allows to save configurations and generate work reports, to provide proof of quality and traceability.

Download the Aldes softwares directly here: <https://services.aldes.com/logiciels>

BIM OBJECT DOWNLOAD PLATFORM

Aldes CAD Library

Enjoy free and direct access (no user account required) to our library of smart 3D objects and easily locate Aldes product objects in REVIT™ native format as well as DWG 3D and DXF 2D formats compatible with many CAD solutions. Aldes CAD Library, the platform that supports your BIM project design for the sustainable construction and outfitting of buildings.

Visit cad.aldes.com

ALDES TRAINING

aldes formation		Installation	Maintenance
Heat recovery CMEV	Title	Heat recovery ventilation In new and refurbished individual housing	Heat recovery ventilation maintenance in individual housing
	Duration	2 days	2 days
	Fields of application		
	Audience	Installers, design offices, design managers	Maintenance provider technicians

Check the Aldes training catalogue and schedule on www.services.aldes.com in the “Aldes training” section or send us an email: aldes.formation@aldes.com, by phone: +33 (0)442 327 766



(1) Software available on PC - Update during semester 2 2020

(2) Software available on PC (via USB connection to InspirAIR™) or app - Available during semester 2 2020

EXPLODED VIEW

InspirAIR® Top



- | | |
|--|---|
| A Light signal | E Adaptable air filters |
| B 4 Ø160 aeraulic connections | F High-efficiency heat exchanger |
| C Easy-access to high-efficiency motors | G 100 % automatic bypass |
| D Filter cap to be removed without any tool | |

RANGE DESCRIPTION

- 2 airflow settings (300 m³/h and 450 m³/h)
- 2 finitions (Classic and Premium)
- 2 control modes (constant flow and constant speed)
- 2 references with enthalpic exchanger

PROJECT TYPES



- Single-family dwellings and multi-occupancy housing
- New buildings and major refurbishments

RANGE AND REFERENCES

INSPIRAIR® TOP

Description	Reference	Energy class
InspirAIR® Top 300 Classic	11023473	A
InspirAIR® Top 300 Premium	11023474	A
InspirAIR® Top 300 Premium ERV	11023477	A
InspirAIR® Top 450 Classic	11023475	A
InspirAIR® Top 450 Premium	11023476	A
InspirAIR® Top 450 Premium ERV	11023478	B

SCOPE OF SUPPLY

	★ CLASSIC	★★★ PREMIUM
Wall mounting cradle	Included	Included
Ø 160 connector for aeraulic connection	Included	Included
Electrical power cable (1.5 m - 2 x 1 mm²)	Not included	Not included
Water trap kit	Not included*	Not included*
AldesConnect™ modem	Not included*	Included
InspirAIR® CO ₂ remote control	Not included*	Not included*
InspirAIR® remote control	Not included*	Not included*

* Available as accessories

STANDARDS AND REGULATIONS

NF 205 AUTO CERTIFICATION



Article	Designation	Area of employment (m³/h)		Thermic efficiency	Weighted electrical power (W/Th/C)
		Min	Max		
11023474	InspirAIR® Top 300 Premium	60 (T2)	210 (T5 et + jusqu'à 4 sanitaires)	96.0 %	69.1
11023476	InspirAIR® Top 450 Premium	90 (T3)	240 (T5 et + jusqu'à 5 sanitaires)	94.0 %	83.5

PASSIV HAUS CERTIFICATION



Article	Designation	Area of employment (m³/h)		Thermic efficiency	SPI (W/m²/h)
		Min	Max		
11023473	InspirAIR® Top 300 Classic	86	254	86.0 %	0.24
11023474	InspirAIR® Top 300 Premium	86	254	87.0 %	0.27
11023475	InspirAIR® Top 450 Classic	107	362	86.0 %	0.33
11023476	InspirAIR® Top 450 Premium	107	362	87.0 %	0.37

PEB CERTIFICATION



Article	Designation	180 m³/h	230 m³/h	280 m³/h	330 m³/h
11023473	InspirAIR® Top 300 Classic	87.0 %	85.0 %	84.0 %	83.0 %
11023474	InspirAIR® Top 300 Premium	87.0 %	86.0 %	85.0 %	85.0 %

Article	Designation	260 m³/h	320 m³/h	400 m³/h	470 m³/h
11023475	InspirAIR® Top 450 Classic	84.0 %	83.0 %	81.0 %	79.0 %
11023476	InspirAIR® Top 450 Premium	88.0 %	86.0 %	84.0 %	83.0 %


Article	Designation	Max employment area	P elec Fan (W)
11023473	InspirAIR® Top 300 Classic	332 m³/h @ 196 Pa	67
11023474	InspirAIR® Top 300 Premium	330 m³/h @ 200 Pa	73,8
11023475	InspirAIR® Top 450 Classic	473 m³/h @ 190 Pa	128,4
11023476	InspirAIR® Top 450 Premium	475 m³/h @ 190 Pa	146,5

ACCESSORIES

Description	Reference
Connected air quality sensor Walter®	11023470
InspirAIR® CO ₂ remote control	11023480
InspirAIR® remote control	11023479
AldesConnect™ Box	11023386
CO ₂ sensor	11017090
230V / 24V power supply for CO2 sensor	11017180
2 speed remote control wired	11026011
InspirAIR® Top condensate kit	11023483
InspirAIR® Top floor mounting kit	11023484
InspirAIR® Top ceiling manifold	11023485
OCTA 160 sealed sound attenuator	11094633
InspirAIR® external preheating coil	11023225
InspirAIR® Top internal preheating coil	11023486
InspirAIR® Top external post-heating coil	11023487

CONSUMABLES

Description	Reference
InspirAIR® Top dust filter	11023490
InspirAIR® Top pollen filter	11023491
InspirAIR® Top particle filter	11023492
InspirAIR® Top fine particle filter	11023493
InspirAIR® Top bacteria filter	11023494
InspirAIR® Top particle + VOC filter	11023495

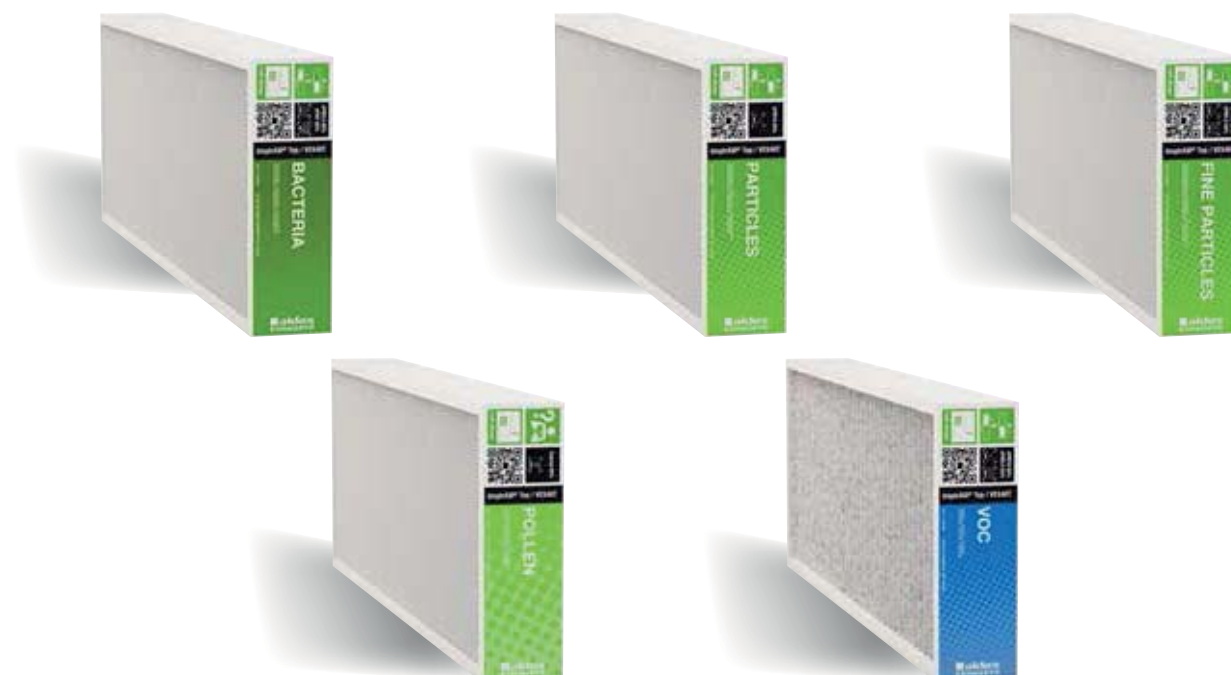

MAIN FEATURES

INSPIRAIR® TOP RANGE

	InspirAIR® Top 300 Classic	InspirAIR® Top 300 Premium	InspirAIR® Top 300 Premium ERV
			
Indoor air quality & filtration			
Compatibility with Walter®	With modem accessory	Standard	Standard
Air supply filters (incoming)*	Coarse 65 % with 48 mm fold	ePM10 50 % with 48 mm fold	ePM10 50 % with 48 mm fold
Exhaust filter (outgoing)*	Coarse 65 % flat	Coarse 65 % flat	Coarse 65 % flat
Custom filter recommendations	With modem accessory	Yes	Yes
Radon mode	Yes	Yes	Yes
Humidity recovery	No	No	Yes
Performance			
Maximum airflow	330 m³/h @ 200 Pa	331 m³/h @ 200 Pa	332 m³/h @ 200 Pa
ErP - SPI (W/m³/h)	0.17	0.20	0.20
Thermic efficiency following EN 13141-7 Conditions : 7°C	94% @ 60 m³/h 88% @ 240 m³/h 87% @ 345 m³/h	94% @ 60 m³/h 90% @ 240 m³/h 89% @ 345 m³/h	Heat alone following EN308 91% @ 100 m³/h 89% @ 150 m³/h 86% @200 m³/h
Acoustic – radiated sound level	125 m³/h @ 60 Pa 43,4 dB(A) 220 m³/h @ 50 Pa 50,5 dB(A)	125 m³/h @ 60 Pa 39,9 dB(A) 220 m³/h @ 50 Pa 46,1 dB(A)	125 m³/h @ 60 Pa 38,9 dB(A) 220 m³/h @ 50 Pa 45 dB(A)
Certifications			
NF Auto	No	Yes	No
PassivHaus	Yes	Yes	Yes
PEB	Yes	Yes	Yes
Dimensions			
Dimensions: L x H x D (mm)	1088 x 560 x 560	1088 x 560 x 560	1088 x 560 x 560
Weight (kg)	28,0 kg	41,0 kg	41,0 kg
Design			
Light signal	Non	Yes	Yes
Side panels on unit	Non	Yes	Yes
Control			
Constant airflow with 4 possible speed settings	Yes	Yes	Yes
Constant speed with 4 possible speed settings	Yes	Yes	Yes
Summer/Winter comfort - automatic bypass	Yes	Yes	Yes
Internal preheating coil 1,0 kW	Accessory	Accessory	Accessory
External preheating coil 1,5 kW	Accessory	Accessory	Accessory
External post- heating coil 300 W	Accessory	Accessory	Accessory
Connectivity			
Modbus	Standard	Standard	Standard
AldesConnect™	With modem accessory	Standard	Standard
0-10 V inputs/outputs	2 x inputs / 1 x output	2 x inputs / 1 x output	2 x inputs / 1 x output
On/off contact	Yes	Yes	Yes
Aldes Configurator	Yes	Yes	Yes
Installation & Maintenance			
Easy reversal of airflows	Yes	Yes	Yes
Wall mounting kit	Yes	Yes	Yes
Floor installation feet	Accessory	Accessory	Accessory
Connectors for aeraulic connections	D160 included in PPE	D160 included in PPE	D160 included in PPE
Easy frontal access to all critical components	Yes	Yes	Yes


* As per ISO 16890

InspirAIR® Top 450 Classic	InspirAIR® Top 450 Premium	InspirAIR® Top 450 Premium ERV
		
With modem accessory	Standard	Standard
Coarse 65 % with 48 mm fold	ePM10 50 % with 48 mm fold	ePM10 50 % with 48 mm fold
Coarse 65 % with 48 mm fold	Coarse 65 % with 48 mm fold	Coarse 65 % flat
With modem accessory	Yes	Yes
Yes	Yes	Yes
No	No	Yes
470 m³/h @ 200 Pa	470 m³/h @ 200 Pa	470 m³/h @ 200 Pa
0.25	0.29	0.30
93% @ 90 m³/h 87% @ 329 m³/h 87% @ 470 m³/h	94% @ 60 m³/h 89% @ 240 m³/h 89% @ 345 m³/h	Heat alone following EN308 86% @ 200 m³/h 81% @ 300 m³/h 76% @ 400 m³/h
125 m³/h @ 65 Pa 42,6 dB(A) 315 m³/h @ 50 Pa 56,8 dB(A)	125 m³/h @ 65 Pa 42,7 dB(A) 315 m³/h @ 50 Pa 53,3 dB(A)	125 m³/h @ 65 Pa 41,1 dB(A) 315 m³/h @ 50 Pa 52,8 dB(A)
No	Yes	No
Yes	Yes	Yes
Yes	Yes	Yes
1088 x 560 x 560	1088 x 560 x 560	1088 x 560 x 560
28,0 kg	41,0 kg	41,0 kg
Non	Yes	Yes
Non	Yes	Yes
Yes	Yes	Yes
Yes	Yes	Yes
Yes	Yes	Yes
Accessory	Accessory	Accessory
Accessory	Accessory	Accessory
Accessory	Accessory	Accessory
Standard	Standard	Standard
With modem accessory	Standard	Standard
2 x inputs / 1 x output	2 x inputs / 1 x output	2 x inputs / 1 x output
Yes	Yes	Yes
Yes	Yes	Yes
Yes	Yes	Yes
Yes	Yes	Yes
Accessory	Accessory	Accessory
D160 included in PPE	D160 included in PPE	D160 included in PPE
Yes	Yes	Yes



DIMENSIONS AND WEIGHT

INSPIRAIR® TOP

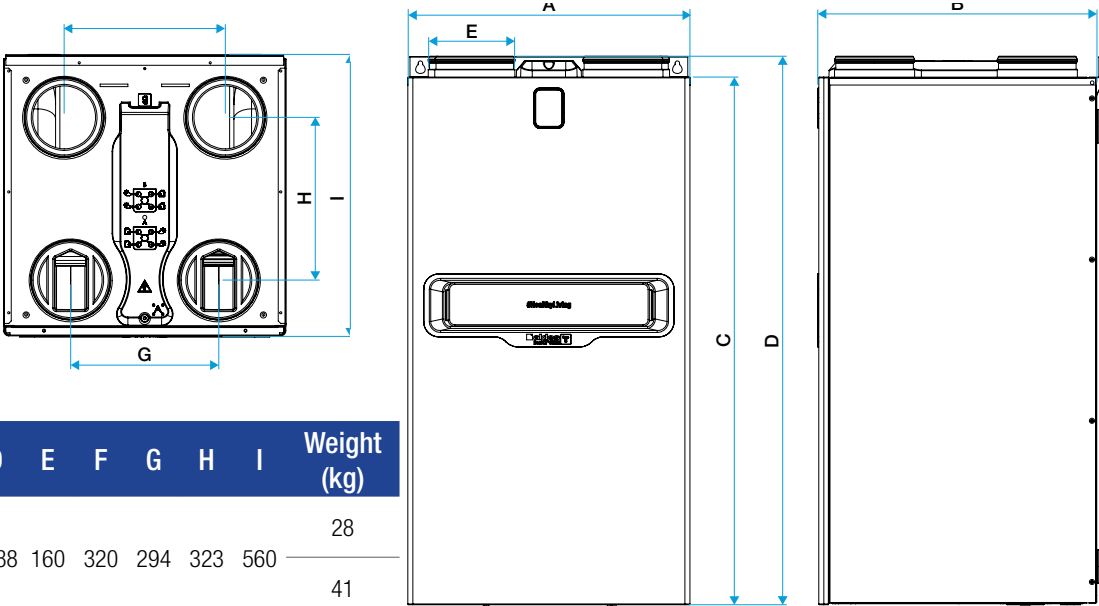

Description	A	B	C	D	E	F	G	H	I	Weight (kg)
InspirAIR® Top Classic	560	560	1045	1088	160	320	294	323	560	28
InspirAIR® Top Premium										41

Dimensions in mm


ELECTRICAL DETAILS

Model	Power supply	IP rating	Max. current	Max. power
InspirAIR® Top 300	230V - 50/60 Hz single-phase	IP22, Class I	1.8 A	240 W
InspirAIR® Top 450	230V - 50/60 Hz single-phase	IP22, Class I	2.5 A	350 W

AERAILIC CONNECTION



InspirAIR® Top is designed for easy inversion of airflows on site.

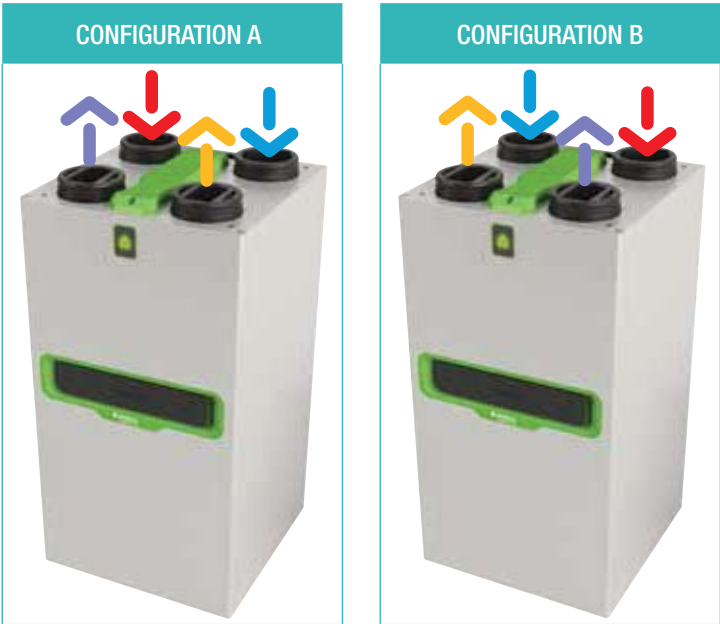

The unit is delivered in configuration A.

To switch to B, simply reverse the filters, confirm the change in the remote control and connect the condensate to the corresponding side.

The change takes less than 5 minutes!

	Air supply (indoors)		Extract air (indoors)
	Exhaust air (outdoor)		Fresh air (outdoor)



ACOUSTIC PERFORMANCE

Unit alone (as per NF EN ISO 3741 02-2012 and NF EN ISO 5135 07-1999)

INSPIRAIR® TOP 300 CLASSIC

Airflow Qv (m³/h)	Pressure Δ P st (Pa)	Power consumption (W)	Product sound power level (Lw dB(A))	Sound pressure level Lw dB(A)	
				Extract	Supply
125	65	24	43,4	33,8	49,1
126	100	31	46,7	33,9	51,3
162	100	40	48,2	37	55,5
220	50	53	50,5	36,6	54,6
250	50	69	52,5	39,8	57,8

INSPIRAIR® TOP 300 PREMIUM

Airflow Qv (m³/h)	Pressure Δ P st (Pa)	Power consumption (W)	Product sound power level (Lw dB(A))	Sound pressure level Lw dB(A)	
				Extract	Supply
125	65	20	39,9	34,5	53,1
126	100	26	43,4	35,5	54,4
162	100	35	43,3	38,1	58,6
220	50	43	46,1	37,9	57,7
250	50	68	47,4	41,2	60,6

INSPIRAIR® TOP 300 PREMIUM ERV

Airflow Qv (m³/h)	Pressure Δ P st (Pa)	Power consumption (W)	Product sound power level (Lw dB(A))	Sound pressure level Lw dB(A)	
				Extract	Supply
125	65	20	38,9	33,1	52,8
126	100	27	43,7	34,6	54,3
162	100	33	46,9	38,2	58,2
220	50	40	45	37,6	57,3
250	50	52	47,4	40,9	60,2

INSPIRAIR® TOP 450 CLASSIC

Airflow Qv (m³/h)	Pressure Δ P st (Pa)	Power consumption (W)	Product sound power level (Lw dB(A))	Sound pressure level Lw dB(A)	
				Extract	Supply
125	65	22	42,6	38,5	59,6
315	50	111	56,8	43,8	63,4

INSPIRAIR® TOP 450 PREMIUM

Airflow Qv (m³/h)	Pressure Δ P st (Pa)	Power consumption (W)	Product sound power level (Lw dB(A))	Sound pressure level Lw dB(A)	
				Extract	Supply
125	65	27	42,7	40	60,6
315	50	93	53,3	44,8	65,4

INSPIRAIR® TOP 450 PREMIUM ERV


Airflow Qv (m³/h)	Pressure Δ P st (Pa)	Power consumption (W)	Product sound power level (Lw dB(A))	Sound pressure level Lw dB(A)	
				Extract	Supply
125	65	29	41,1	41	60,1
315	50	95	52,8	45	65,4

AIRFLOW CURVES (AIRFLOW / PRESSURE)

INSPIRAIR® TOP 300 CLASSIC / PREMIUM

Filter configuration 300 Classic: air supply: "Pollen" (Coarse 65 %) / exhaust: Dust (Coarse 65 %)


Filter configuration 300 Premium: air supply: "Particles" (ePM10 50 %) / exhaust: Dust (Coarse 65 %)

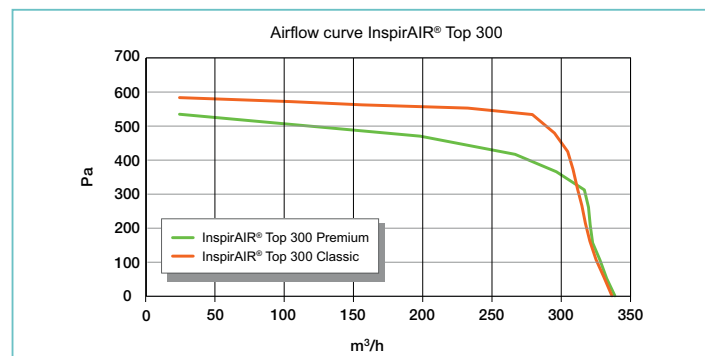

INSPIRAIR® TOP 450 CLASSIC / PREMIUM

Filter configuration 450 Classic: air supply: "Pollen" (Coarse 65 %) / exhaust: "Pollen" (Coarse 65 %)

Filter configuration 450 Premium: air supply: "Particles" (ePM10 50 %) / exhaust: "Pollen" (Coarse 65 %)

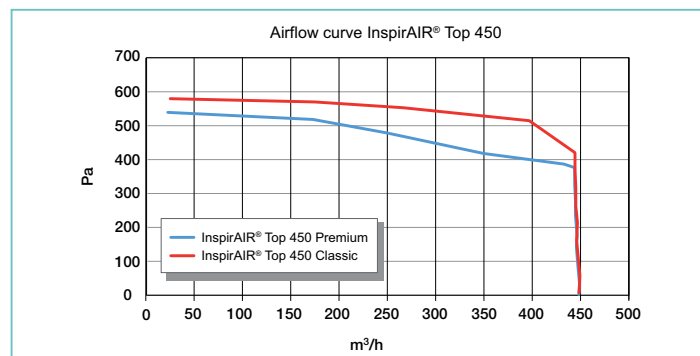

THERMAL EFFICIENCY


INSPIRAIR® TOP

Exchanger alone as per EN 308 (Source: supplier data)


Test conditions:

- Outdoor air = dry air at 5°C, HR < 20 %
- Indoor air = dry air at 25°C, HR < 20 %

INSPIRAIR® TOP 300 CLASSIC / PREMIUM

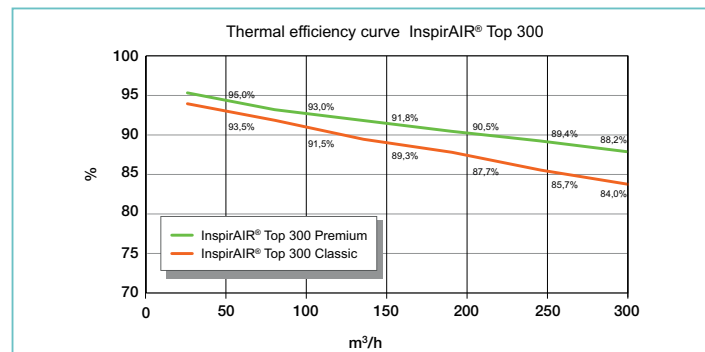

INSPIRAIR® TOP 450 CLASSIC / PREMIUM

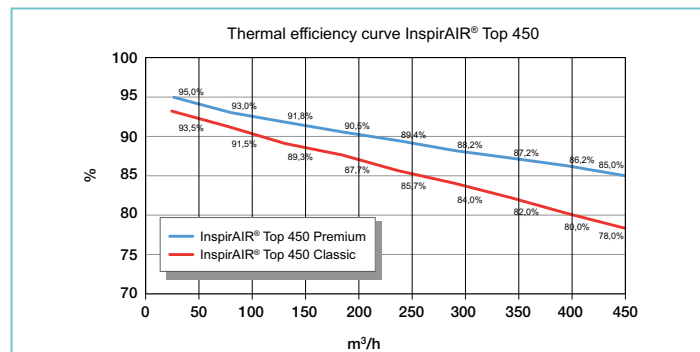

Thermic efficiency following EN 13141-7 - Conditions : 7°C

Article	Designation	60 m³/h	240 m³/h	345 m³/h
11023473	InspirAIR® Top 300 Classic	94.5 %	88.0 %	87.0 %
11023474	InspirAIR® Top 300 Premium	94.0 %	90.0 %	89.0 %
Article	Designation	90 m³/h	329 m³/h	470 m³/h
11023475	InspirAIR® Top 450 Classic	93.0 %	87.5 %	87.0 %
11023476	InspirAIR® Top 450 Premium	94.0 %	89.0 %	89.0 %

Thermic efficiency following EN 13141-7 - Conditions : 2°C

Article	Designation	60 m³/h	240 m³/h	345 m³/h
11023473	InspirAIR® Top 300 Classic	91.0 %	91.0 %	89.0 %
11023474	InspirAIR® Top 300 Premium	91.0 %	92.0 %	89.5 %
Article	Designation	90 m³/h	329 m³/h	470 m³/h
11023475	InspirAIR® Top 450 Classic	88.0 %	88.0 %	87.0 %
11023476	InspirAIR® Top 450 Premium	89.0 %	89.0 %	89.0 %

Lined area for notes, consisting of multiple horizontal lines.

Lined area for notes, consisting of multiple horizontal lines.

#HealthyLiving*

Because air is not just for us to breathe but it also helps us live a healthier life, Aldes commits to taking care of the health of each building occupant.

Our skills in air management enables us to help design indoor living spaces that are smart and caring. Where we live, work and have fun, Aldes watches over our well-being through innovative solutions that improve indoor air quality.

High-performance solutions that respect the environment, enabling the renewal and purification of indoor air, heating it, cooling it, and providing domestic hot water.

More than just a movement, **#HealthyLiving** embodies our principles of being caring and responsible, as well as our pioneering spirit.



For more information about **InspirAIR®**
Top, contact your Aldes advisor,
visit rekuperace-aldes.cz

Distributor pro Českou republiku:
4heat s.r.o., Ječná 29a, Brno
rekuperace-aldes.cz

Aldes headquarters - 20, boulevard Irène Joliot-Curie - 69694 Vénissieux Cedex - France
Tel. +33 (0)4 78 77 15 15 - Fax +33 (0)4 78 76 15 97

rekuperace-aldes.cz | rekuperace@4heat.cz